

gizmo

Designed to discretely illuminate
objects in museum display cases



Color accuracy with CRI 95

Tool-less interchangeable lenses

Available in many variations

Gizmo is a mini spotlight with excellent color rendition.

Gizmo has been a proud servant in museums all over Scandinavia for well over 10 years, and, during that time has been continuously improved in order to meet lighting designers expectations of a high-quality fixture.

New! Gizmo is now widely available in CRI 95 and approximately 10% more lumens.

Gizmo is available for the following lighting systems:



Pico Trac (12V DC)

- Fixture has built-in 0–100% dimmer
- No external dimming possible
- Easy to install



LED Profile (Constant current)

- Dimming from the wall switch or app
- Uses external LED driver functions e.g. Casambi, DMX or DALI
- Installation using connector cables




TECHNICAL SPECIFICATION

Material	Lamp housing made of aluminum, Yoke and details made of steel, Lens made of polycarbonate
Finish	Grey (RAL 7040) Black (RAL 9005) White (RAL 9016) Brass
System	Pico Trac LED Profile
Protection class	IP20
Power consumption	2,1W/3W
Beam angle	Interchangeable lenses
Color temperatures	2200K, 2700K, 3000K, 4000K, 5700K
Swivels	>365°
Tilts	>90°
Weight	50 g
Features	Toolless pan, Tilt lock
Optional accessories	Snoot, Magnet, Ceiling cup

LIGHT DATA

LED lumen	210 lm
Luminaire lumen	159 lm (Narrow)
CRI	95
Red component R9	>80
MacAdam	3-step ellipse (SDCM 3)
TM30-18 Rf	95
TM30-18 Rg	104

* Data from 3000K

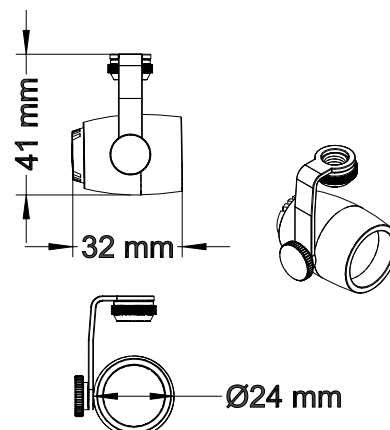

SPOTLIGHTS GIZMO



GIZMO / CCL

For LED Profile

Operated by external LED driver, max 700 mA / 2,1W, Vf = 3V

2200K	GIZ22-CCL-*	Gizmo CC/700mA LED-profile 2200K	190lm, CRI 80, Vf=3V, 700mA, lens N	
2700K	GIZ27B-CCL-*	Gizmo CC/700mA LED-profile 2700K	200lm, CRI 95, Vf=3V, 700mA, lens N	NEW
3000K	GIZ30B-CCL-*	Gizmo CC/700mA LED-profile 3000K	210lm, CRI 95, Vf=3V, 700mA, lens N	NEW
4000K	GIZ40B-CCL-*	Gizmo CC/700mA LED-profile 4000K	220lm, CRI 95, Vf=3V, 700mA, lens N	NEW
5700K	GIZ57B-CCL-*	Gizmo CC/700mA LED-profile 5700K	230lm, CRI 95, Vf=3V, 700mA, lens N	NEW

* 1: Grey  2: Black  3: White  4: Brass 



GIZMO / CCS

No driver / adapter included

Operated by external LED driver, max 700 mA / 2,1W, Vf = 3V

2200K	GIZ22-CCS-*	Gizmo CC/700mA Solo 2200K	190lm, CRI 80, Vf=3V, 700mA, lens N, 1m cable	
2700K	GIZ27B-CCS-*	Gizmo CC/700mA Solo 2700K	200lm, CRI 95, Vf=3V, 700mA, lens N, 1m cable	NEW
3000K	GIZ30B-CCS-*	Gizmo CC/700mA Solo 3000K	210lm, CRI 95, Vf=3V, 700mA, lens N, 1m cable	NEW
4000K	GIZ40B-CCS-*	Gizmo CC/700mA Solo 4000K	220lm, CRI 95, Vf=3V, 700mA, lens N, 1m cable	NEW
5700K	GIZ57B-CCS-*	Gizmo CC/700mA Solo 5700K	230lm, CRI 95, Vf=3V, 700mA, lens N, 1m cable	NEW

* 1: Grey  2: Black  3: White  4: Brass 



GIZMO / PICO TRAC

Built-in local dimmer (0-100%)

Fits Pico Trac

2200K	GIZ22-PT-*	Gizmo 12V DC/3W PicoTrac 2200K	190lm, CRI 80, lens N, dimmer	
2700K	GIZB27-PT-*	Gizmo 12V DC/3W PicoTrac 2700K	200lm, CRI 95, lens N, dimmer	NEW
3000K	GIZB30-PT-*	Gizmo 12V DC/3W PicoTrac 3000K	210lm, CRI 95, lens N, dimmer	NEW
4000K	GIZB40-PT-*	Gizmo 12V DC/3W PicoTrac 4000K	220lm, CRI 95, lens N, dimmer	NEW
5700K	GIZB57-PT-*	Gizmo 12V DC/3W PicoTrac 5700K	230lm, CRI 95, lens N, dimmer	NEW

* 1: Grey  2: Black  3: White  4: Brass 



**GIZMO PICO TRAC CASAMBI**

Fixture is configured using the Casambi app
Fits Pico Trac

2200K	GIZ22-PTC-*	Gizmo 12V DC/3W PT Casambi 2200K	190lm, CRI 80, lins N, Casambi	
2700K	GIZ27B-PTC-*	Gizmo 12V DC/3W PT Casambi 2700K	200lm, CRI 95, lins N, Casambi	NEW
3000K	GIZ30B-PTC-*	Gizmo 12V DC/3W PT Casambi 3000K	210lm, CRI 95, lins N, Casambi	NEW
4000K	GIZ40B-PTC-*	Gizmo 12V DC/3W PT Casambi 4000K	220lm, CRI 95, lins N, Casambi	NEW
5700K	GIZ57B-PTC-*	Gizmo 12V DC/3W PT Casambi 5700K	230lm, CRI 95, lins N, Casambi	NEW

* 1: Grey  2: Black  3: White  4: Brass 

**GIZMO PICO TRAC DMX**

Control via wired DMX, 3-wire
Fits Pico Trac

2700K	GIZ27B-PTX-*	Gizmo 12V DC/3W PT DMX 2700K	200lm, CRI 95, lens N, DMX	NEW
3000K	GIZ30B-PTX-*	Gizmo 12V DC/3W PT DMX 3000K	210lm, CRI 95, lens N, DMX	NEW
4000K	GIZ40B-PTX-*	Gizmo 12V DC/3W PT DMX 4000K	220lm, CRI 95, lens N, DMX	NEW
5700K	GIZ57B-PTX-*	Gizmo 12V DC/3W PT DMX 5700K	230lm, CRI 95, lens N, DMX	NEW

* 1: Grey  2: Black  3: White  4: Brass 

**PICO TRAC DMX CABLES**

For distributing DMX in PTX fixtures

GIZ-KAX-20	First Connector Cable DMX Picotrac 200mm	Plug Female Picotrac DMX, 3-wire	NEW
GIZ-KMX-5	Connector Cable DMX Picotrac 50mm	Plug Female/Female DMX, 3-wire	NEW
GIZ-KMX-10	Connector Cable DMX Picotrac 100mm	Plug Female/Female DMX, 3-wire	NEW
GIZ-KMX-15	Connector Cable DMX Picotrac 150mm	Plug Female/Female DMX, 3-wire	NEW
GIZ-KMX-25	Connector Cable DMX Picotrac 250mm	Plug Female/Female DMX, 3-wire	NEW
GIZ-KMX-35	Connector Cable DMX Picotrac 350mm	Plug Female/Female DMX, 3-wire	NEW
GIZ-KMX-65	Connector Cable DMX Picotrac 650mm	Plug Female/Female DMX, 3-wire	NEW
GIZ-KMX-105	Connector Cable DMX Picotrac 1050mm	Plug Female/Female DMX, 3-wire	NEW
GIZ-KMX-205	Connector Cable DMX Picotrac 2050mm	Plug Female/Female DMX, 3-wire	NEW
GIZ-KMX-305	Connector Cable DMX Picotrac 3050mm	Plug Female/Female DMX, 3-wire	NEW
GIZ-KSX-100	Extention Cable DMX Picotrac 1000mm	Plug Male/Female DMX, 3-wire	NEW
GIZ-KTX-P	Terminator DMX Picotrac	Terminator 120 Ohm, DMX	NEW

SPOTLIGHTS

GIZMO



GIZMO LENSES

Lenses for Gizmo fixture

GIZ-L-N	Gizmo Lens N	Narrow (Standard), 12°
GIZ-L-S	Gizmo Lens S	Spot, 19°
GIZ-L-M	Gizmo Lens M	Medium, 21°
GIZ-L-M+	Gizmo Lens M+	Medium Plus, 27°
GIZ-L-W	Gizmo Lens W	Wide, 36°
GIZ-L-VW	Gizmo Lens VW	Very Wide, 41°
GIZ-L-E	Gizmo Lens E	Elliptical, 10×42°
GIZ-L-E+	Gizmo Lens E+	Elliptical Plus, 22×40°



CEILING CUPS

Surface and recessed mounting
Suitable for CCS fixtures

GIZ-TK-*	Ceiling Cup, Surface mounting	M8
ART-TK-*	Ceiling Cup, Recessed mounting	M8 and M10

* 1: Grey  2: Black  3: White 



GIZMO SNOOT

Extended glare protection for Gizmo fixtures
Length 25 mm with included velour

GIZ-B25-*	Gizmo Snoot
-----------	-------------

* 1: Grey  2: Black  3: White  4: Brass 



MAGNETIC BRACKET

Magnetic base set
Fits all Gizmo, Arty and Dinkey CCS fixtures

GIZ-MF	Neodymium Magnet, screw nut not included	16mm
GIZ-MF-M	Screw-nut, for Neodymium Magnet	M6MF 8 FZB DIN 6923



SPOTLIGHTS
GIZMO



Elegance in every detail – the Gizmo brass fixture now features a matching brass-colored cable.