

# ARTY ACCENT

A compact spotlight that handles many different lighting situations



Available for all Ljusdesign lighting systems

Small and stylish

Interchangeable lenses

**Arty Accent** (formerly Arty PAR) is a medium-sized spotlight capable of handling most lighting situations. It features a compact and robust lamp housing made of aluminium.

While based on our reliable Dinkey platform, Arty Accent typically offers a higher power and light output comparatively.

Despite being a young spotlight, Arty Accent has already seen a number of improvements, including tool-less removal of lenses, filter holder implementation, as well as the addition of a Honeycomb accessory.

## Arty Accent is available for the following lighting systems:



### 3-Phase Track (220-240V AC)

- \* Fixture has built-in 0-100% dimmer
- \* No external dimming possible



### Pico Trac (12V DC)

- \* Fixture has built-in 0-100% dimmer
- \* No external dimming possible
- \* Easy to install



### LED Profile (Constant current)

- \* Dimmable from the wall or the app
- \* Can utilize external LED driver functions e.g. wall dimmers, Casambi, DMX or DALI
- \* Installed with connector cables



### Mini Trac (12V DC)

- \* Fixture has built-in 0-100% dimmer
- \* No external dimming possible
- \* Easy to install








## TECHNICAL SPECIFICATION

Material	Lamp housing made of aluminium, Yoke and details made of steel, Lens made of polycarbonate
Finish	Grey (RAL 7040) Black (RAL 9005) White (RAL 9016)
System	3-phase circuit track Pico Trac Mini Trac LED Profile
Protection class	IP20
Power consumption	6W/8W/10W
Beam angle	Interchangeable lenses
Color temperatures	2700K, 3000K, 4000K
Swivels	>365°
Tilts	>90°
Weight	280 g
Features	Filter holder, Toolless pan, Tilt lock

## LIGHT DATA

LED Lumen	510 lm
Luminaire Lumen	345 lm (Narrow lens)
CRI	90
Red component R9	>60
MacAdam	3-step ellipse (SDCM 3)
TM30-18 Rf	94
TM30-18 Rg	102

\* Data from 3000K, 8W/10W

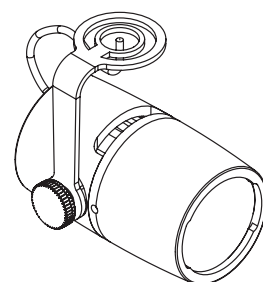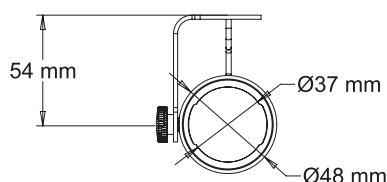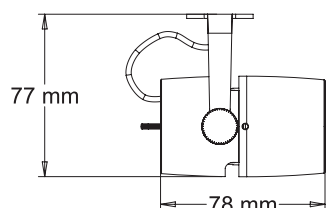

SPOTLIGHTS  
ARTY ACCENT



**ARTY ACCENT / 230V**

Built-in local dimmer (0-100%)  
Fits most known 3-phase tracks  
Slim profile adapter

**Arty Accent, 10W**

2700K	ARTACC27C-HV-*	Arty Accent 230V/10W 2700K	480lm, CRI 90, lens N, 3-phase multi adapter, dimmer
3000K	ARTACC30C-HV-*	Arty Accent 230V/10W 3000K	510lm, CRI 90, lens N, 3-phase multi adapter, dimmer
4000K	ARTACC40C-HV-*	Arty Accent 230V/10W 4000K	540lm, CRI 90, lens N, 3-phase multi adapter, dimmer

**Arty Accent, 6W**

2700K	ARTACC27B-HV-*	Arty Accent 230V/6W 2700K	250lm, CRI 90, lens N, 3-phase multi adapter, dimmer
3000K	ARTACC30B-HV-*	Arty Accent 230V/6W 3000K	260lm, CRI 90, lens N, 3-phase multi adapter, dimmer
4000K	ARTACC40B-HV-*	Arty Accent 230V/6W 4000K	300lm, CRI 80, lens N, 3-phase multi adapter, dimmer

\* 1: Grey  2: Black  3: White



**ARTY ACCENT / CCL**

For LED Profile  
Operated by external LED driver

**Arty Accent CC for LED Profile, 1000mA**

2700K	ARTACC27D-CCL-*	Arty Accent CC/1000mA LED-profile 2700K	420lm, CRI 90, Vf=6V, 1000mA, lens N
3000K	ARTACC30D-CCL-*	Arty Accent CC/1000mA LED-profile 3000K	450lm, CRI 90, Vf=6V, 1000mA, lens N

**Arty Accent CC for LED Profile, 500mA**

2700K	ARTACC27B-CCL-*	Arty Accent CC/500mA LED-profile 2700K	420lm, CRI 90, Vf=12V, 500mA, lens N
3000K	ARTACC30B-CCL-*	Arty Accent CC/500mA LED-profile 3000K	450lm, CRI 90, Vf=12V, 500mA, lens N

**Arty Accent CC 250lm for LED Profile, 1200mA**

2700K	ARTACC27-CCL-*	Arty Accent CC/1200mA LED-profile 2700K	250lm, CRI 90, Vf=3V, 1200mA, lens N
3000K	ARTACC30-CCL-*	Arty Accent CC/1200mA LED-profile 3000K	260lm, CRI 90, Vf=3V, 1200mA, lens N

\* 1: Grey  2: Black  3: White



**ARTY ACCENT / CCS**

No driver / adapter included  
Operated by external LED driver

**Arty Accent CC Solo, 1000mA**

2700K	ARTACC27D-CCS-*	Arty Accent CC/1000mA Solo 2700K	420lm, CRI 90, Vf=6V, 1000mA, lens N, 1m cable
3000K	ARTACC30D-CCS-*	Arty Accent CC/1000mA Solo 3000K	450lm, CRI 90, Vf=6V, 1000mA, lens N, 1m cable

**Arty Accent CC Solo, 500mA**

2700K	ARTACC27B-CCS-*	Arty Accent CC/500mA Solo 2700K	420lm, CRI 90, Vf=12V, 500mA, lens N, 1m cable
3000K	ARTACC30B-CCS-*	Arty Accent CC/500mA Solo 3000K	450lm, CRI 90, Vf=12V, 500mA, lens N, 1m cable

**Arty Accent CC 250lm Solo, 1200mA**

2700K	ARTACC27-CCS-*	Arty Accent CC/1200mA Solo 2700K	250lm, CRI 90, Vf=3V, 1200mA, lens N, 1m cable
3000K	ARTACC30-CCS-*	Arty Accent CC/1200mA Solo 3000K	260lm, CRI 90, Vf=3V, 1200mA, lens N, 1m cable

\* 1: Grey  2: Black  3: White





### ARTY ACCENT / PICO TRAC

Built-in local dimmer (0-100%)

Fits Pico Trac

2700K	ARTACC27C-PT-*	Arty Accent 12V DC/8W PicoTrac 2700K	480lm, CRI 90, lens N, dimmer
3000K	ARTACC30C-PT-*	Arty Accent 12V DC/8W PicoTrac 3000K	510lm, CRI 90, lens N, dimmer
4000K	ARTACC40C-PT-*	Arty Accent 12V DC/8W PicoTrac 4000K	540lm, CRI 90, lens N, dimmer

\* 1: Grey  2: Black  3: White



### ARTY ACCENT / MINI TRAC

Built-in local dimmer (0-100%)

Fits Mini Trac

2700K	ARTACC27C-MT-*	Arty Accent 12V DC/8W MiniTrac 2700K	480lm, CRI 90, lens N, dimmer
3000K	ARTACC30C-MT-*	Arty Accent 12V DC/8W MiniTrac 3000K	510lm, CRI 90, lens N, dimmer
4000K	ARTACC40C-MT-*	Arty Accent 12V DC/8W MiniTrac 4000K	540lm, CRI 90, lens N, dimmer

\* 1: Grey  2: Black  3: White



### ARTY ACCENT / 12V DC SOLO

Built-in local dimmer (0-100%)

Operated with 12V DC

2700K	ARTACC27C-LVS-*	Arty Accent 12V DC/8W Solo 2700K	480lm, CRI 90, lens N, dimmer, 1m cable
3000K	ARTACC30C-LVS-*	Arty Accent 12V DC/8W Solo 3000K	510lm, CRI 90, lens N, dimmer, 1m cable
4000K	ARTACC40C-LVS-*	Arty Accent 12V DC/8W Solo 4000K	540lm, CRI 90, lens N, dimmer, 1m cable

\* 1: Grey  2: Black  3: White



### ARTY ACCENT & DINKEY LENSES

Lenses for Arty Accent and Dinkey fixtures

DIN-L-VN	Dinkey/Arty Accent lins, Very Narrow	Plain Tight, ca 12°
DIN-L-N	Dinkey/Arty Accent lins, Narrow	Frosted Narrow (Standard Lens), ca 14°
DIN-L-M	Dinkey/Arty Accent lins, Medium	Frosted Medium, ca 22°
DIN-L-W	Dinkey/Arty Accent lins, Wide	Frosted Wide, ca 28°
DIN-L-E	Dinkey/Arty Accent lins, Elliptic	Elliptical, 46x12°